

# Assembly Language for Intel-Based Computers, 4<sup>th</sup> Edition

Kip R. Irvine

## Chapter 2: IA-32 Processor Architecture

Slides prepared by Kip R. Irvine

Revision date: 09/25/2002

- [Chapter corrections](#) (Web) [Assembly language sources](#) (Web)
- [Printing a slide show](#)

(c) Pearson Education, 2002. All rights reserved. You may modify and copy this slide show for your personal use, or for use in the classroom, as long as this copyright statement, the author's name, and the title are not changed.

---

---

---

---

---

---

---

---

---

---

## Chapter Overview

- General Concepts
- IA-32 Processor Architecture
- IA-32 Memory Management
- Components of an IA-32 Microcomputer
- Input-Output System

---

---

---

---

---

---

---

---

---

---

## General Concepts

- Basic microcomputer design
- Instruction execution cycle
- Reading from memory
- How programs run

---

---

---

---

---

---

---


---

---

---

## Basic Microcomputer Design

- clock synchronizes CPU operations
- control unit (CU) coordinates sequence of execution steps
- ALU performs arithmetic and bitwise processing

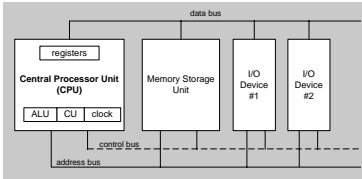


---

---

---

---

---

---

---


---

---

---

## Clock

- synchronizes all CPU and BUS operations
- machine (clock) cycle measures time of a single operation
- clock is used to trigger events




---

---

---

---

---

---

---


---

---

---

## Instruction Execution Cycle

- Fetch
- Decode
- Fetch operands
- Execute
- Store output




---

---

---

---

---

---

---

---

---

---



## Superscalar

A superscalar processor has multiple execution pipelines. In the following, note that Stage S4 has left and right pipelines (u and v).

		Stages						
		S1	S2	S3	S4		S5	S6
				u	v			
Cycles	1	I-1						
	2	I-2	I-1					
	3	I-3	I-2	I-1				
	4	I-4	I-3	I-2	I-1			
	5		I-4	I-3	I-1	I-2		
	6			I-4	I-3	I-2	I-1	
	7				I-3	I-4	I-2	I-1
	8					I-4	I-3	I-2
	9						I-4	I-3
	10							I-4

For  $k$  states and  $n$  instructions, the number of required cycles is:

$$k + n$$

---

---

---

---

---

---

---

---

---


---

---

---

## Reading from Memory

- Multiple machine cycles are required when reading from memory, because it responds much more slowly than the CPU. The steps are:
  - address placed on address bus
  - Read Line (RD) set low
  - CPU waits one cycle for memory to respond
  - Read Line (RD) goes to 1, indicating that the data is on the data bus




---

---

---

---

---

---

---

---

---

---

---

---

## Cache Memory

- High-speed expensive static RAM both inside and outside the CPU.
  - Level-1 cache: inside the CPU
  - Level-2 cache: outside the CPU
- Cache hit: when data to be read is already in cache memory
- Cache miss: when data to be read is not in cache memory.

---

---

---

---

---

---

---

---


---

---

---

---

## How a Program Runs

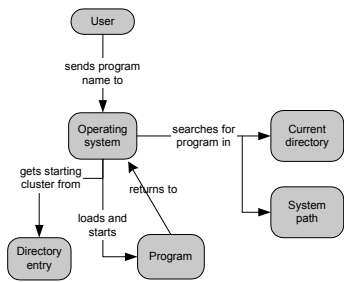

---

---

---

---

---

---

---

---

## Multitasking

- OS can run multiple programs at the same time.
- Multiple threads of execution within the same program.
- Scheduler utility assigns a given amount of CPU time to each running program.
- Rapid switching of tasks
  - gives illusion that all programs are running at once
  - the processor must support task switching.

---

---

---

---

---

---

---

---

## IA-32 Processor Architecture

- Modes of operation
- Basic execution environment
- Floating-point unit
- Intel Microprocessor history

---

---

---

---

---

---

---

---

## Modes of Operation

- Protected mode
  - native mode (Windows, Linux)
- Real-address mode
  - native MS-DOS
- System management mode
  - power management, system security, diagnostics

- Virtual-8086 mode
  - hybrid of Protected
  - each program has its own 8086 computer

---

---

---

---

---

---

---

---

---

---

## Basic Execution Environment

- Addressable memory
- General-purpose registers
- Index and base registers
- Specialized register uses
- Status flags
- Floating-point, MMX, XMM registers

---

---

---

---

---

---

---

---

---

---

## Addressable Memory

- Protected mode
  - 4 GB
  - 32-bit address
- Real-address and Virtual-8086 modes
  - 1 MB space
  - 20-bit address

---

---

---

---

---

---

---


---

---

---

## General-Purpose Registers

Named storage locations inside the CPU, optimized for speed.

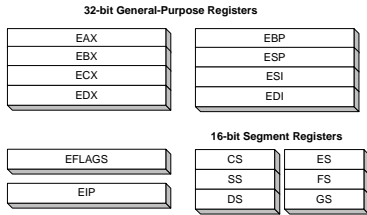


---

---

---

---

---

---

---


---

---

---

## Accessing Parts of Registers

- Use 8-bit name, 16-bit name, or 32-bit name
- Applies to EAX, EBX, ECX, and EDX



32-bit	16-bit	8-bit (high)	8-bit (low)
EAX	AX	AH	AL
EBX	BX	BH	BL
ECX	CX	CH	CL
EDX	DX	DH	DL

---

---

---

---

---

---

---

---

---

---

## Index and Base Registers

- Some registers have only a 16-bit name for their lower half:

32-bit	16-bit
ESI	SI
EDI	DI
EBP	BP
ESP	SP

---

---

---

---

---

---

---

---

---

---

## Some Specialized Register Uses (1 of 2)

- General-Purpose
  - EAX – accumulator
  - ECX – loop counter
  - ESP – stack pointer
  - ESI, EDI – index registers
  - EBP – extended frame pointer (stack)
- Segment
  - CS – code segment
  - DS – data segment
  - SS – stack segment
  - ES, FS, GS - additional segments

---

---

---

---

---

---

---

---

## Some Specialized Register Uses (2 of 2)

- EIP – instruction pointer
- EFLAGS
  - status and control flags
  - each flag is a single binary bit

---

---

---

---

---

---

---

---

## Status Flags

- Carry
  - unsigned arithmetic out of range
- Overflow
  - signed arithmetic out of range
- Sign
  - result is negative
- Zero
  - result is zero
- Auxiliary Carry
  - carry from bit 3 to bit 4
- Parity
  - sum of 1 bits is an even number

---

---

---

---

---

---


---

---



## Floating-Point, MMX, XMM Registers

- Eight 80-bit floating-point data registers
  - ST(0), ST(1), . . . , ST(7)
  - arranged in a stack
  - used for all floating-point arithmetic
- Eight 64-bit MMX registers
- Eight 128-bit XMM registers for single-instruction multiple-data (SIMD) operations



---

---

---

---

---

---

---

---

---

---

## Intel Microprocessor History

- Intel 8086, 80286
- IA-32 processor family
- P6 processor family
- CISC and RISC

---

---

---

---

---

---

---

---

---

---

## Early Intel Microprocessors

- Intel 8080
  - 64K addressable RAM
  - 8-bit registers
  - CP/M operating system
  - S-100 BUS architecture
  - 8-inch floppy disks!
- Intel 8086/8088
  - IBM-PC Used 8088
  - 1 MB addressable RAM
  - 16-bit registers
  - 16-bit data bus (8-bit for 8088)
  - separate floating-point unit (8087)

---

---

---

---

---

---

---

---

---

---

## The IBM-AT

- Intel 80286
  - 16 MB addressable RAM
  - Protected memory
  - several times faster than 8086
  - introduced IDE bus architecture
  - 80287 floating point unit

---

---

---

---

---

---

---

---

---

---

## Intel IA-32 Family

- Intel386
  - 4 GB addressable RAM, 32-bit registers, paging (virtual memory)
- Intel486
  - instruction pipelining
- Pentium
  - superscalar, 32-bit address bus, 64-bit internal data path

---

---

---

---

---

---

---

---

---

---

## Intel P6 Family

- Pentium Pro
  - advanced optimization techniques in microcode
- Pentium II
  - MMX (multimedia) instruction set
- Pentium III
  - SIMD (streaming extensions) instructions
- Pentium 4
  - NetBurst micro-architecture, tuned for multimedia

---

---

---

---

---

---

---

---

---

---

## CISC and RISC

- CISC – complex instruction set
  - large instruction set
  - high-level operations
  - requires microcode interpreter
  - examples: Intel 80x86 family
- RISC – reduced instruction set
  - simple, atomic instructions
  - small instruction set
  - directly executed by hardware
  - examples:
    - ARM (Advanced RISC Machines)
    - DEC Alpha (now Compaq)

---

---

---

---

---

---

---

---

---

---

## IA-32 Memory Management

- Real-address mode
- Calculating linear addresses
- Protected mode
- Multi-segment model
- Paging

---

---

---

---

---

---

---

---

---

---

## Real-Address mode

- 1 MB RAM maximum addressable
- Application programs can access any area of memory
- Single tasking
- Supported by MS-DOS operating system

---

---

---

---

---

---

---


---

---

---

## Segmented Memory

Segmented memory addressing: absolute (linear) address is a combination of a 16-bit segment value added to a 16-bit offset

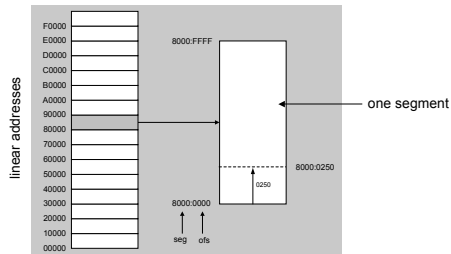

---

---

---

---

---

---

---

---

---

---

## Calculating Linear Addresses

- Given a segment address, multiply it by 16 (add a hexadecimal zero), and add it to the offset
- Example: convert 08F1:0100 to a linear address

Adjusted Segment value:	0 8 F 1 0
Add the offset:	0 1 0 0
Linear address:	0 9 0 1 0

---

---

---

---

---

---

---

---

---

---

## Your turn . . .

What linear address corresponds to the segment/offset address 028F:0030?

$$028F0 + 0030 = 02920$$

Always use hexadecimal notation for addresses.

---

---

---

---

---

---

---

---

---

---

## Your turn . . .

What segment addresses correspond to the linear address 28F30h?

Many different segment-offset addresses can produce the linear address 28F30h. For example:

28F0:0030, 28F3:0000, 28B0:0430, . . .

---

---

---

---

---

---

---

---

---

---

## Protected Mode (1 of 2)

- 4 GB addressable RAM
  - (00000000 to FFFFFFFFh)
- Each program assigned a memory partition which is protected from other programs
- Designed for multitasking
- Supported by Linux & MS-Windows

---

---

---

---

---

---

---

---

---

---

## Protected mode (2 of 2)

- Segment descriptor tables
- Program structure
  - code, data, and stack areas
  - CS, DS, SS segment descriptors
  - global descriptor table (GDT)
- MASM Programs use the Microsoft flat memory model

---

---

---

---

---

---

---


---

---

---

## Flat Segment Model

- Single global descriptor table (GDT).
- All segments mapped to entire 32-bit address space

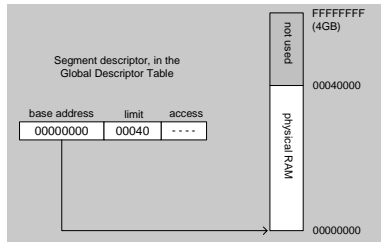


---

---

---

---

---

---

---


---

---

---

## Multi-Segment Model

- Each program has a local descriptor table (LDT)
  - holds descriptor for each segment used by the program

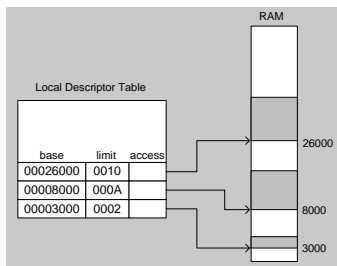


---

---

---

---

---

---

---

---

---

---

## Paging

- Supported directly by the CPU
- Divides each segment into 4096-byte blocks called pages
- Sum of all programs can be larger than physical memory
- Part of running program is in memory, part is on disk
- Virtual memory manager (VMM) – OS utility that manages the loading and unloading of pages
- Page fault – issued by CPU when a page must be loaded from disk

---

---

---

---

---

---

---

---

---

---

## Components of an IA-32 Microcomputer

- Motherboard
- Video output
- Memory
- Input-output ports

---

---

---

---

---

---

---

---

## Motherboard

- CPU socket
- External cache memory slots
- Main memory slots
- BIOS chips
- Sound synthesizer chip (optional)
- Video controller chip (optional)
- IDE, parallel, serial, USB, video, keyboard, joystick, network, and mouse connectors
- PCI bus connectors (expansion cards)

---

---

---

---


---

---

---

---

## Intel D850MD Motherboard

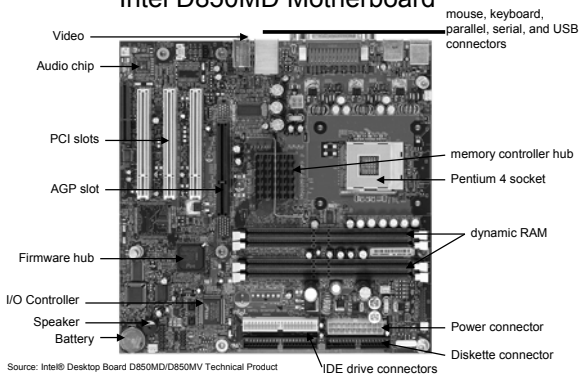

---

---

---

---

---

---

---

---

## Video Output

- Video controller
  - on motherboard, or on expansion card
  - AGP (accelerated graphics port technology)\*
- Video memory (VRAM)
- Video CRT Display
  - uses raster scanning
  - horizontal retrace
  - vertical retrace
- Direct digital LCD monitors
  - no raster scanning required

\* This link may change over time.

---

---

---

---

---

---

---

---

## Sample Video Controller (ATI Corp.)

- 128-bit 3D graphics performance powered by RAGE™ 128 PRO
- 3D graphics performance
- Intelligent TV-Tuner with Digital VCR
- TV-ON-DEMAND™
- Interactive Program Guide
- Still image and MPEG-2 motion video capture
- Video editing
- Hardware DVD video playback
- Video output to TV or VCR



---

---

---

---

---

---

---

---

## Memory

- ROM
  - read-only memory
- EPROM
  - erasable programmable read-only memory
- Dynamic RAM (DRAM)
  - inexpensive; must be refreshed constantly
- Static RAM (SRAM)
  - expensive; used for cache memory; no refresh required
- Video RAM (VRAM)
  - dual ported; optimized for constant video refresh
- CMOS RAM
  - complimentary metal-oxide semiconductor
  - system setup information
- See: [Intel platform memory](#) (Intel technology brief; link address may change)

---

---

---

---

---

---

---

---



## Input-Output Ports

- USB (universal serial bus)
  - intelligent high-speed connection to devices
  - up to 12 megabits/second
  - USB hub connects multiple devices
  - *enumeration*: computer queries devices
  - supports *hot* connections
- Parallel
  - short cable, high speed
  - common for printers
  - bidirectional, parallel data transfer
  - Intel 8255 controller chip

---

---

---

---

---

---

---

---

## Input-Output Ports (cont)

- Serial
  - RS-232 serial port
  - one bit at a time
  - uses long cables and modems
  - 16550 UART (universal asynchronous receiver transmitter)
  - programmable in assembly language

---

---

---

---

---

---

---

---

## Levels of Input-Output

- Level 3: Call a library function (C++, Java)
  - easy to do; abstracted from hardware; details hidden
  - slowest performance
- Level 2: Call an operating system function
  - specific to one OS; device-independent
  - medium performance
- Level 1: Call a BIOS (basic input-output system) function
  - may produce different results on different systems
  - knowledge of hardware required
  - usually good performance
- Level 0: Communicate directly with the hardware
  - May not be allowed by some operating systems

---

---

---

---

---


---

---

---

## Displaying a String of Characters

When a HLL program displays a string of characters, the following steps take place:



---

---

---

---

---


---

---

---

## ASM Programming levels

ASM programs can perform input-output at each of the following levels:

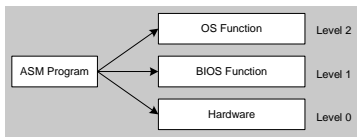

---

---

---

---

---

---

---

---



42 69 6E 61 72 79

---

---

---

---

---

---

---

---

## Printing this Slide Show

To print this slide show with black characters on a white background, do the following:

- Select Print... from the File menu.
- Select Handouts in the Print what drop-down box.
- Select 2 or 3 in the Slides per page drop-down box.
- Select the Pure black and white check box (optional)
- Click on OK to begin printing.

[Back to the title page](#)

---

---

---

---

---

---

---

---

---

---